




SIP..

SIP SOCKET(SCREW PIN)2.54mm

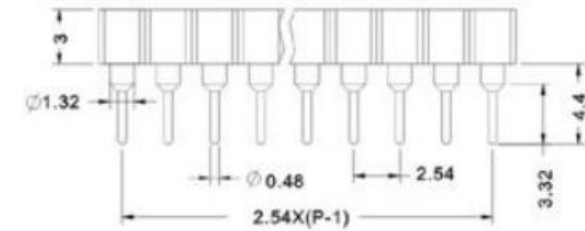

Material and Finish:

Insulator: Glass Filled Thermoplastic PPS UL 94V-0

Contact: (BeCu), Beryllium Copper, **Inner Contact Gold Plated, Outer Sleeve Tin Plated**

Finishes: Outer Shield: Tin Plated

Inner Contact: Gold Plated

Performance Characteristics:

Voltage Rating: AC 250V

Current Rating: 1AMP

Withstanding Voltage: 1000V AC For 1Minute

Contact Resistance: 15 Milliohms Max

Insulator Resistance: 1000 Megohms Min

Operating Temperature: -55° C--+105° C

Contact Style: Four-Fingered Inner Contact