

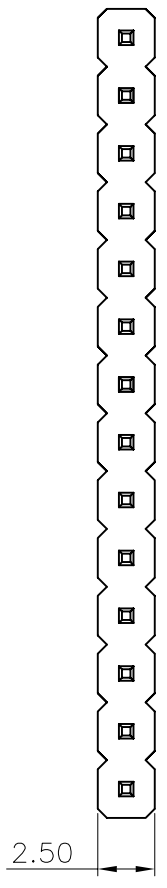


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		轉量產版	2006.12.27	丁敏

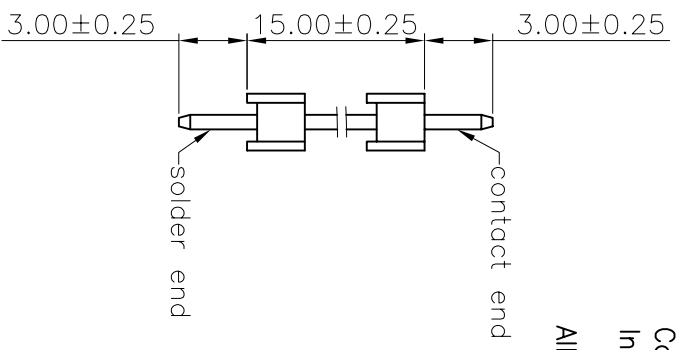

<2.54 X No. of Positions>±0.30

<2.54 X No. of Contacts - 2.54>±0.25

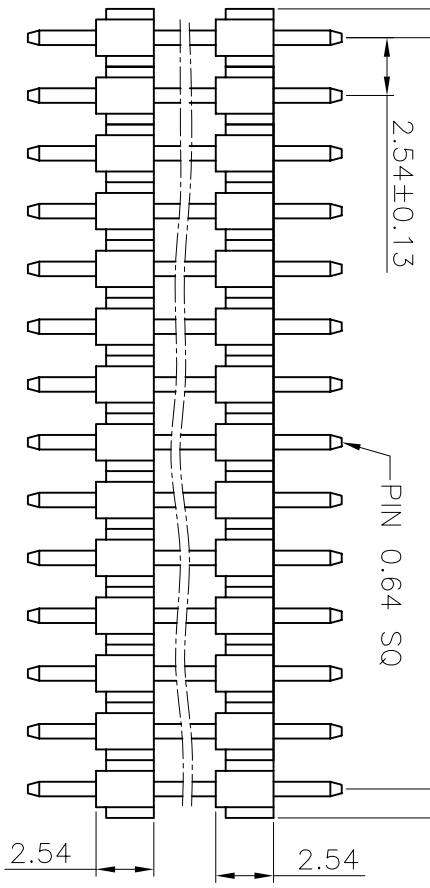


**Specifications**  
 Current Rating: 3Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 600V AC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

**Materials**  
 Contact Material: Brass  
 Insulation Material: Polyester, UL 94V-0 PBT

All materials must be GP materials

Recommended P.C.Board

Hole Layout  
 (Tolerance:±0.05)



**Ordering Information**

G PHA102 - XX XX A 19

No. of Pins per Row  
 02-40

Contact Plating  
 01=Tin  
 02=Gold Flash  
 Duplex Plating  
 05=Gold Flash/Tin

格菱股份有限公司  
 Greenconn Corporation

REV.	UNIT.	SCALE.	PAGE.
01	mm	5:1	1/1

GENERAL TOLERANCE	
X' ± 5"	X. ± 0.30
X' ± 2"	X. ± 0.20
.XX' ± 1"	.XX ± 0.15
.XXX' ± 0.5"	.XXX ± 0.10

DESIGN:	丁敏	DATE:	2006.12.27
CHECKED:		DATE:	
AUDITED:		DATE:	
APPROVED:		DATE:	

DWG. NO.	G PHA102-A19
PART NO.	G PHA102-XX XX A 19

TITLE:	2.54 PIN HEADER SINGLE ROW DIP TYPE BASE 2.54H
--------	--