
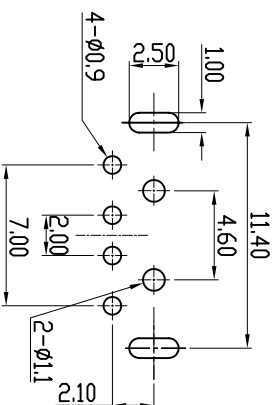
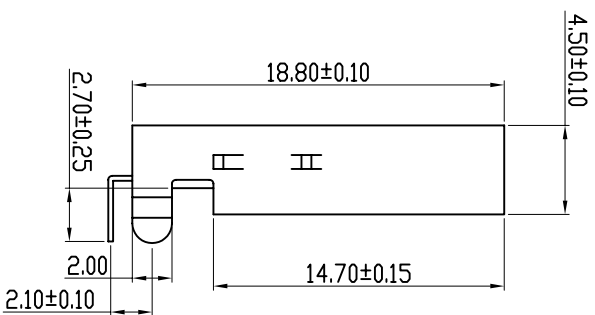
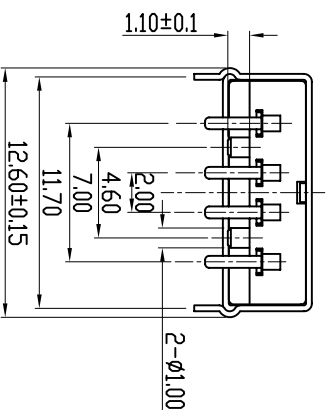
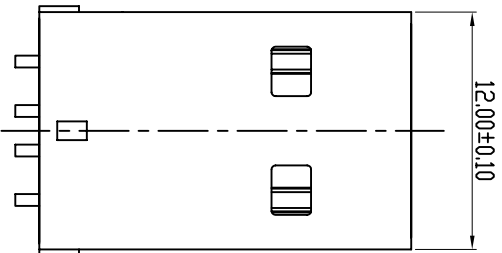


REV.	DESCRIPTION	DATE	DESIGNER	APPROVED
A/0	The last word	06/04/10	W.X.Y	



Specification

- 1.Voltage Current Rating:1AMP.30V AC
- 2.Insulation Resistance:1000M $\Omega$  Min
- 3.Contact Resistance:30m $\Omega$  Max
- 4.Dielectric Withstanding Voltage:500V AC
- 5.Temperature Range:-20°C to +60°C

NOTE:

Tolerances unless otherwise specified:  
0-10:±0.15; 10-20:±0.20; 20-30:±0.25

PART NO EXPLAIN:  
USB-A1011M-□□4□

Shell Plate spec: T=Plateg tin, N=Plateg nickel  
Housing Color: B=Black, N=Nature, W=White  
Contact Plate spec: (0=FU", 1=3U", 2=6U", 3=15U", 4=30U")

NO.	VARIETY	MATERIAL	QTY	REMARK
3	Shell	SPCC	1	T=0.30 Plateg nickel
2	Housing	PA66	1	Nature/Black/White
1	Contact	C2680	4	T=0.25 Plateg Gold

**CZT 东莞意华电子有限公司**

TITLE: USB A TYPE(MALE) DIP 90°

UNIT:	mm	DESIGNER:	W.X.Y	SHEET: 1		PART NO:	USB-A1060M-□□4□
3RD:		DESIGN:	W.X.Y	CHART NO:	1004-0060	MATE NO:	
SCALE:	1:1	APPRD:					
REV:	A/0	EXAMINE:					